


Biglift 2.65 Saaa

Electro-hydraulic twin-ram lift, 6.5 t with superstructure with arms

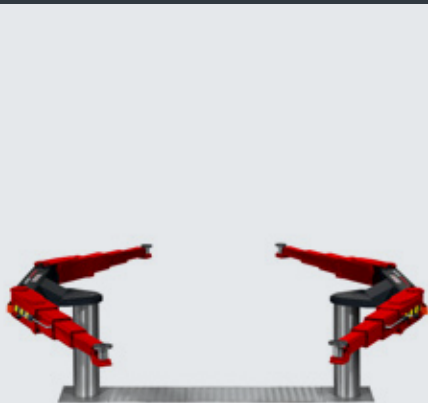

Application

- ☐ Repairs and maintenance
- ☐ Body work

Approvals / recommendations

- ☐ Saaa 145:
Volkswagen Group
- ☐ Saaa 230:
Renault,
Volkswagen Group
- ☐ Saaa 265:
Mercedes-Benz,
Volkswagen Group

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- ☐ Great stability, even with uneven weight distribution; due to the cylinder diameter of 213 mm

Superstructure:

- ☐ Triple telescopic arms
- ☐ Wheel bearing of the first extension arm
- ☐ Low minimum height

Saaa 265:

- ☐ Mechanical ratchet system integrated in the hydraulic unit
- ☐ Air preparation unit for oiled and regulated compressed air (min . 6 bar / max . 10 bar)

Standard colours

- ☐ Base plates: RAL 7016 - grey
- ☐ Arms: RAL 3020 - red

Versions:

- ☐ Saaa 145, Saaa 230, Saaa 265

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated
- ☐ Self-carrying (Saaa 230)

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor with covers
- ☐ Ceiling installation

Optional extras:

- ☐ Large program of extra pads

Zinc coating and special colours on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine

+49 5971 8602-02

info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190

DK-7150 Barrit

+45 76 82 13 30

info@autopstenhoj.com

Technical data

Lifting capacity	6,500 kg
Lifting height	1,865 mm
Working height	2,000 - 2,060 mm
Cylinder diameter	2 x 213 mm
Distance between cylinders	Saaa 145: 1,350 mm Saaa 230: 2,150 mm Saaa 265: 2,650 mm
Lifting / lowering time (high pressure)	approx. 45 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	18 l
Voltage	230 / 400 V – 50 Hz – 16 A

Arm superstructure

Total width	3,350 mm
Lifting pad included in the delivery	11028 (135 – 195 mm)
Min. height	135 – 195 mm
Drive-through width	Saaa 230: 1,930 mm Saaa 265: 2,430 mm
Arm length, min. - max.	770 – 1,640 mm

