

Sharklift 4.55 F 480/550 (KA 1550/3000)

Electro-hydraulic 4-ram lift, 5.5 t capacity, platforms



Application

- ☐ Check-in
- ☐ Repairs and maintenance
- ☐ Wheel alignment
- ☐ Testing

Approvals / recommendations

- ☐ SHL 4.55 F 550:
Renault,
Volkswagen Group

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ 2 separate hydraulic units with hard-chrome plated cylinders
- ☐ Electronic synchronization between the hydraulic units and pre-programmed top stop
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- ☐ Air preparation unit for oil and regulated compressed air (min. 6 bar / max. 10 bar)

Superstructure:

- ☐ A set of platforms with drive-on ramps and stops
Platforms with tolerances of only max $\pm 0,5$ mm length- and crosswise
- ☐ With two recesses front and rear, as well as distance pieces covering the entire length and fixated by steel edges in sides
- ☐ Preparation for innovative air supply for jacking beam

Standard colours

- ☐ Platforms: RAL 7016 - grey
- ☐ Ramps: RAL 3020 - red
- ☐ Functional surfaces zinc-coated as standard

Versions:

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor
with or without flush-floor device

Contact us with regard to the possibilities of combining with other wheel alignment equipment!

Optional extras:

- ☐ LED-lighting set
- ☐ Precision slip plates
- ☐ Scissor jack

Special colours available on request!



Click the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine

+49 5971 8602-02

info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190

DK-7150 Barrit

+45 76 82 13 30

info@autopstenhoj.com

Technical data



Lifting capacity	5,500 kg
Lifting height	1,865 mm
Working height	2,060 mm
Cylinder diameter	4 x 140 mm
Distance between cylinders	1,550 / 3,000 mm
Lifting / lowering time (high pressure)	approx. 30 sec.
Foundation depth	2,625 mm
Pump unit	2 x 3 kW
Hydraulic oil	18 l
Voltage	230 / 400 V – 50 Hz – 16 A

Platforms

Usable length of platform	F 480: 4,800 mm F 550: 5,500 mm
Wheel base	F 480: 4,150 mm F 550: 4,850 mm
Platform width	650 mm
Distance between platforms	900 mm
Drive-on height	195 mm

Scissor jack (Option)

Lifting capacity	2,600 Kg
Lifting height	250 mm
Operation	air-hydraulic
Lift positions	middle / 790 – 1,460 mm

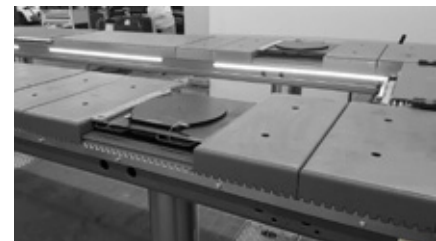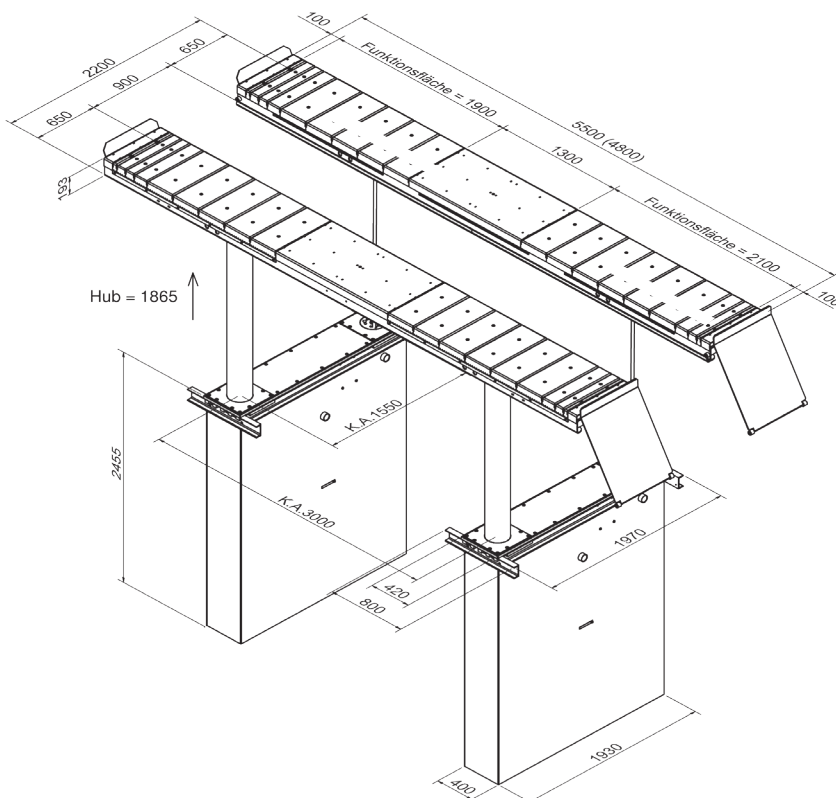

Turn table and fillers fixed



Air supply for scissor jack



Wheel alignment